


Geberit Monolith Plus sanitary module for floor-standing WC, 101 cm, front cladding made of glass

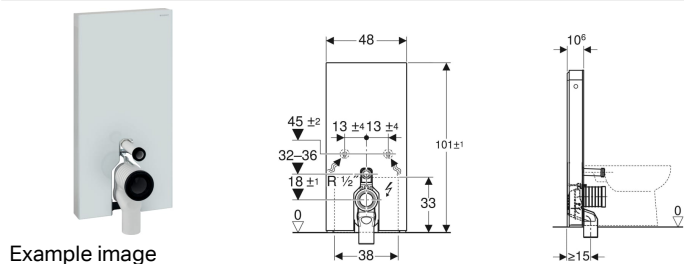

Application purposes

- For floor inlets
- For renovations, conversions and new buildings
- For wall inlets with an inlet height of 18 cm
- For floor-standing WCs with P-bend and water inlet height 32–36 cm above the floor (EN 33)
- For replacing low-level exposed cisterns
- For replacing floor-standing WCs with close-coupled exposed cistern
- For connecting Geberit AquaClean Tuma WC complete solution, floor-standing WC
- For connecting Geberit AquaClean WC enhancement solutions, with accessories
- For mounting on finished floors
- For installation in front of drywalls or solid walls

Characteristics

- Dual flush
- Compensation of dimensional tolerances possible
- Cistern, fully insulated against condensation
- Side cladding made of aluminium brushed
- Self-supporting
- Soft-touch buttons for flush actuation and odour extraction
- Orientation light and odour extraction activated when a user approaches
- Orientation light can be set in seven colours
- User detection range can be set

Scope of delivery

- Water supply connection set with 2 angle stop valves, 1/2"
- Flush bend extension 160 mm
- Sleeve made of EPDM, \varnothing 44 / 55 mm
- Connection bend made of PP, \varnothing 90 mm
- Adaptor socket made of PE-HD, \varnothing 90 / 110 mm

- Day/night detection can be set for orientation light
- Odour extraction unit with ceramic honeycomb filter can be installed without tools
- Ceramic honeycomb filter for odour neutralisation can be replaced without tools
- Odour extraction unit automatically switches off after a predefined running time
- Operation with extra-low voltage, no mains voltage in cistern
- Mains connection with flexible three-wire sheathed cable
- Water supply connection on the bottom
- Water supply connection on the left/right possible with accessories

Technical data

| | |
|--------------------------------------|--------------|
| Protection degree | IPX4 |
| Protection class | I |
| Nominal voltage | 100-240 V AC |
| Mains frequency | 50-60 Hz |
| Operating voltage | 4.1 V DC |
| Power consumption | 5 W |
| Flow pressure | 0.1-10 bar |
| Maximum operating temperature, water | 25 °C |
| Flush volume | 6 l |
| Flush volume small | 3 l |

- Female socket for mains connection
- Power supply unit
- Base cover
- Fastening material for drywall
- Fastening material

| Art. no. | Colour / surface | B | H | T |
|--------------|--|-------|--------|---------|
| 131.202.SI.5 | Front cladding: white glass Side cladding: aluminium | 48 cm | 101 cm | 10.6 cm |
| 131.202.JK.5 | Front cladding: lava glass Side cladding: black chrome aluminium | 48 cm | 101 cm | 10.6 cm |
| 131.202.JL.5 | Front cladding: sand grey glass Side cladding: aluminium | 48 cm | 101 cm | 10.6 cm |
| 131.202.SJ.6 | Front cladding: black glass Side cladding: black chrome aluminium | 48 cm | 101 cm | 10.6 cm |

Accessories

- Lateral water supply connection set for Geberit Monolith sanitary module for WC
- Geberit outlet mounting box
- Conversion set for Geberit AquaClean WC enhancement solutions



-
- Glass thickness 8 mm